Euromaid




FEATURES	
Finish	Matte Black
Extraction	700m³/h
No. of Speeds	3
Control Type	Touch with White LED
Lighting	1 x LED
Filters	2 x Baffle

ACCESSORIES	
Carbon Filter	CF110 (Optional)
Recirculating Kit	IA150BSRK (Optional)
Flue Extension	IAPXMBE1 (Optional)



CPT6MB 60cm Pyramid Canopy Rangehood

Euromaid

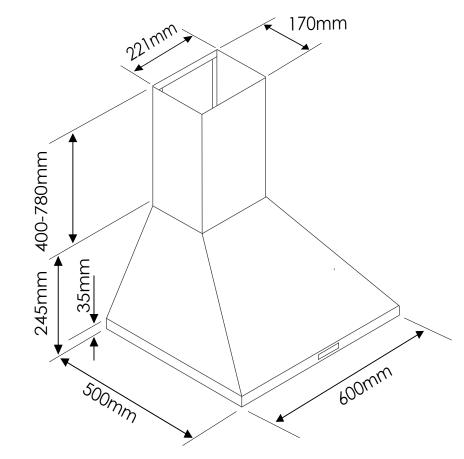

SPECIFICATIONS

DIMENSIONS (W x H x D)		
Power Cord Length	lm	
LED Wattage	1 x 1.5w	
Motor Wattage	190w	
Power	220 - 240V ~ / 50Hz	
Electrical Connection	10A Plug	

DIMENSIONS (W x H x D)		
Carton (mm)	660 x 560 x 310	
Product (mm)	600 x 645 - 1025 x 500	
Recommended Clearance (mm)	650 - 750*	
Duct Diameter (mm)	150	

WEIGHT	
Gross (kg)	10
Net (kg)	7

WARRANTY	
Product	2 Years Parts and Labour

*Install the Rangehood in accordance with the manufacturer's instructions. For optimum performance, we recommend that all Rangehood clearances be a minimum of 650mm to a maximum of 750mm between the top of the cooking surface to the underside of the Rangehood. The distance may be reduced to 600mm to align with AS/NZS 5601.

VERSION NO. 20220114