




FEATURES	
Finish	Matte Black
Extraction	700m³/h
No. of Speeds	3
Control Type	Touch with White LED
Lighting	2 x LED
Filters	3 x Baffle

ACCESSORIES	
Carbon Filter	CF110 (Optional)
Recirculating Kit	IA150BSRK (Optional)
Flue Extension	IAPXMBE1 (Optional)





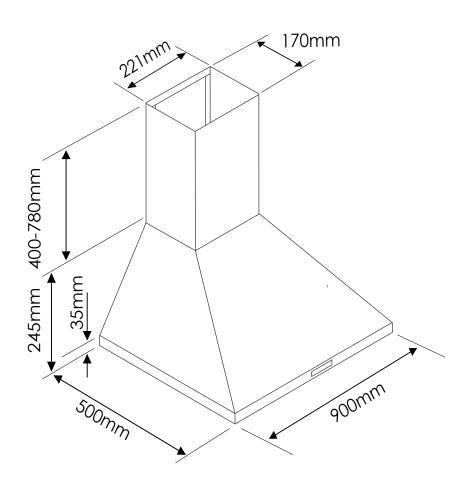

SPECIFICATIONS	
Electrical Connection	10A Plug
Power	220 - 240V ~ / 50Hz
Motor Wattage	190w
LED Wattage	2 x 1.5w
Power Cord Length	1m

DIMENSIONS (W x H x D)	
Carton (mm)	960 x 560 x 310
Product (mm)	900 x 645 - 1025 x 500
Recommended Clearance (mm)	650 - 750*
Duct Diameter (mm)	150

WEIGHT	
Gross (kg)	12
Net (kg)	9

WARRANTY	
Product	2 Years Parts and Labour

*Install the Rangehood in accordance with the manufacturer's instructions. For optimum performance, we recommend that all Rangehood clearances be a minimum of 650mm to a maximum of 750mm between the top of the cooking surface to the underside of the Rangehood. The distance may be reduced to 600mm to align with AS/NZS 5601.

VERSION NO. 20220114